

## TECHNICAL PARAMETER (技术参数)



- ▶ Description (描述)  
Ø127x127mm Nal(Tl) detector

---

- ▶ Scintillation crystal (闪烁晶体)  
Ø127x127mm Nal(Tl)

---

- ▶ PMT (光电倍增管)  
Ø130mm, ET 9390KB

---

- ▶ Typical high voltage (高压范围)  
400V-1100V


---

- ▶ Temperature range (温度范围)  
-20 °C to +65 °C


---

- ▶ Energy resolution (能量分辨率)  
≤8.5% @Cs137

## DRAWING (尺寸图)

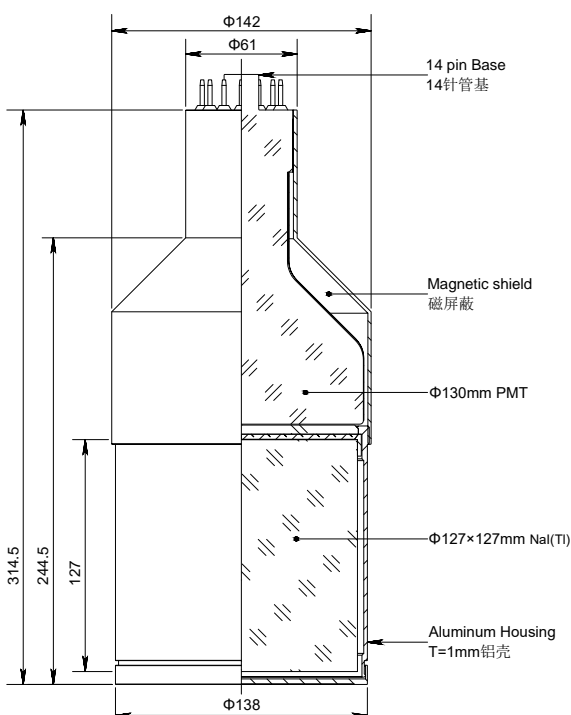

## CONNECTORS (接口)



### 14-pins JEDEC connector (standard pin layout)

Pin 1 = Dynode 1	Pin 8 = Dynode 8
Pin 2 = Dynode 2	Pin 9 = Dynode 9
Pin 3 = Dynode 3	Pin 10 = Dynode 10
Pin 4 = Dynode 4	Pin 11 = Anode
Pin 5 = Dynode 5	Pin 12 = n.c
Pin 6 = Dynode 6	Pin 13 = n.c
Pin 7 = Dynode 7	Pin 14 = Cathode